


2xOF302-40BD2 (oil-less)

Voltage	V	100	100	120	200	200	230	230	3x400	3x440		
Frequency	Hz	50	60	60	50	60	50	60	50	60		
Motor	HP	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2		
	kW	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9		
Displacement ¹⁾	l/min	216	276	276	216	276	216	276	216	276		
	CFM	7.63	9.75	9.75	7.63	9.75	7.63	9.75	7.63	9.75		
FAD @ 8 bar ¹⁾	l/min	76	88	88	76	88	76	88	76	88		
	CFM	2.68	3.11	3.11	2.68	3.11	2.68	3.11	2.68	3.11		
Max. pressure	bar	8	8	8	8	8	8	8	8	8		
	psi	120	120	120	120	120	120	120	120	120		
Max. current	A	15.0	17.4	13.2	8.2	9.2	6.8	8.2	2.8	2.8		
Tank size	litres	40	40	40	40	40	40	40	40	40		
	gallon	10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.6		
Weight	kg	59	59	59	59	59	59	59	59	59		
	lbs	130	130	130	130	130	130	130	130	130		
Noise level	dB(A)/1m	68	69	69	68	69	68	69	68	69		
Thermal protection		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes		
Duty cycle		100%	100%	100%	100%	100%	100%	100%	100%	100%		

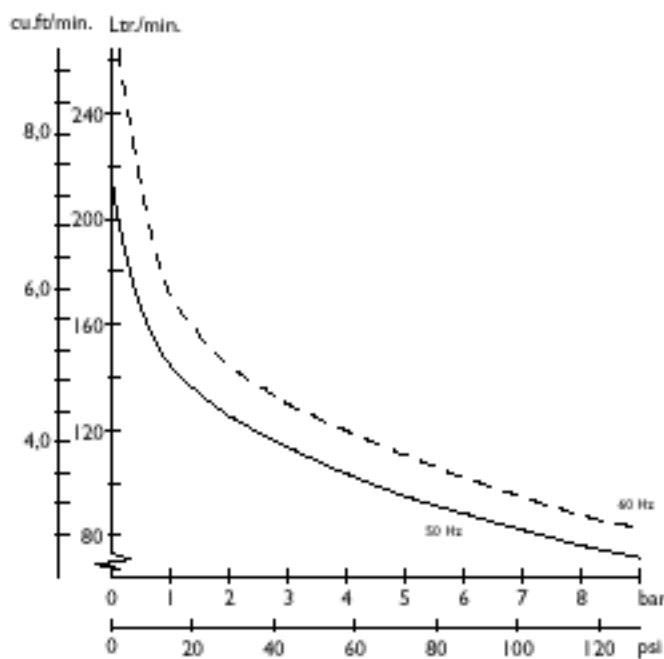

Dimensions (l x w x h)
540 x 570 x 600 mm / 21 2/8 x 22 4/8 x 23 5/8 inch

¹⁾ Displacement is reduced by approx. 18-20% on units with dryer (D). Min. pressure required to operate dryer: 6 bar.

Technical modifications reserved



Laboratory Precision Limited

30 Lanchester Way, Royal Oak Industrial Estate,
Daventry, Northamptonshire, NN11 5PH. United Kingdom
Tel. +44 1327 877774 Fax. +44 1327 877444
sales@silent-air-compressors.com

www.silent-air-compressors.com