


4000-40MD3 (oil-less)

Voltage	V	200	200	230	230	3x200	3x200	3x208	3x400 ²⁾	3x440 ²⁾		
Frequency	Hz	50	60	50	60	50	60	60	50	60		
Motor	HP	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0		
	kW	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2		
Displacement ³⁾	l/min	352	424	352	424	352	424	424	352	424		
	CFM	12.43	14.97	12.43	14.97	12.43	14.97	14.97	12.43	14.97		
FAD @ 8 bar ¹⁾	l/min	180	220	180	220	180	220	220	180	220		
	CFM	6.36	7.77	6.36	7.77	6.36	7.77	7.77	6.36	7.77		
Max. pressure ¹⁾	bar	8	8	8	8	8	8	8	8	8		
	psi	120	120	120	120	120	120	120	120	120		
Max. current	A	16.4	17.6	16.0	16.6	12.8	12.8	12.8	7.2	7.2		
Tank size	litres	40	40	40	40	40	40	40	40	40		
	gallon	10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.6		
Weight	kg	160	160	160	160	160	160	160	160	160		
	lbs	353	353	353	353	353	353	353	353	353		
Noise level	dB(A)/1m	55	55	55	55	55	55	55	55	55		
Thermal protection		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes		
Duty cycle		100%	100%	100%	100%	100%	100%	100%	100%	100%		

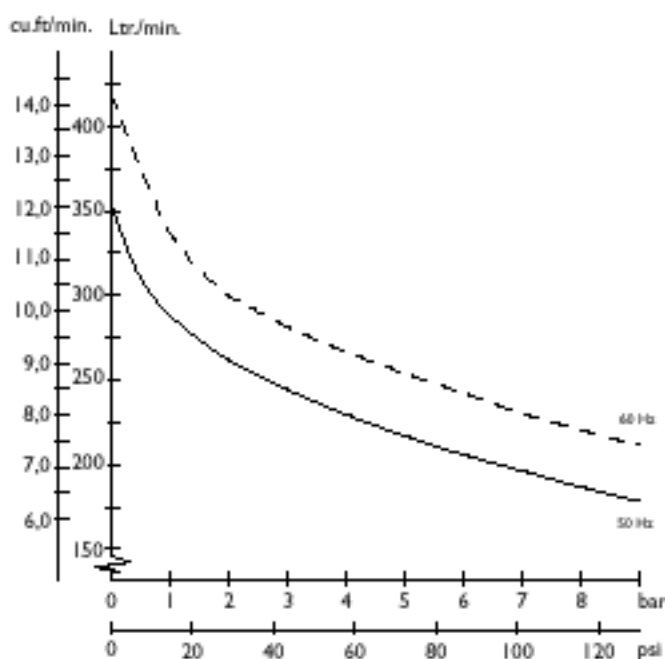

Dimensions (l x w x h)
693 x 760 x 861 mm / 27¹/₈ x 29⁷/₈ x 33⁷/₈ inch

- ¹⁾ Higher pressure available upon request
- ²⁾ Neutral is required in installation
- ³⁾ Displacement is reduced by approx. 18-20% on units with dryer (D). Min. pressure required to operate dryer: 6 bar.

Technical modifications reserved



Laboratory Precision Limited

30 Lanchester Way, Royal Oak Industrial Estate,
Daventry, Northamptonshire, NN11 5PH. United Kingdom
Tel. +44 1327 877774 Fax. +44 1327 877444
sales@silent-air-compressors.com
www.silent-air-compressors.com