


2000-40MD2 (oil-less)

Voltage	V	100	120	200	200	230	230	3x200	3x200	3x208	3x400 ²⁾	3x440 ²⁾
Frequency	Hz	50	60	50	60	50	60	50	60	60	50	60
Motor	HP	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	kW	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1	1.1
Displacement ³⁾	l/min	176	212	176	212	176	212	176	212	212	176	212
	CFM	6.22	7.49	6.22	7.49	6.22	7.49	6.22	7.49	7.49	6.22	7.49
FAD @ 8 bar ³⁾	l/min	90	110	90	110	90	110	90	110	110	90	110
	CFM	3.18	3.88	3.18	3.88	3.18	3.88	3.18	3.88	3.88	3.18	3.88
Max. pressure ¹⁾	bar	8	8	8	8	8	8	8	8	8	8	8
	psi	120	120	120	120	120	120	120	120	120	120	120
Max. current	A	16.0	16.6	8.2	8.8	8.0	8.3	6.4	6.4	6.4	3.6	3.6
Tank size	litres	40	40	40	40	40	40	40	40	40	40	40
	gallon	10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.6	10.6
Weight	kg	116	116	116	116	116	116	116	116	116	116	116
	lbs	256	256	256	256	256	256	256	256	256	256	256
Noise level	dB(A)/1m	52	53	52	53	52	53	52	53	53	52	53
Thermal protection		Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Duty cycle		100%	100%	100%	100%	100%	100%	100%	100%	100%	100%	100%

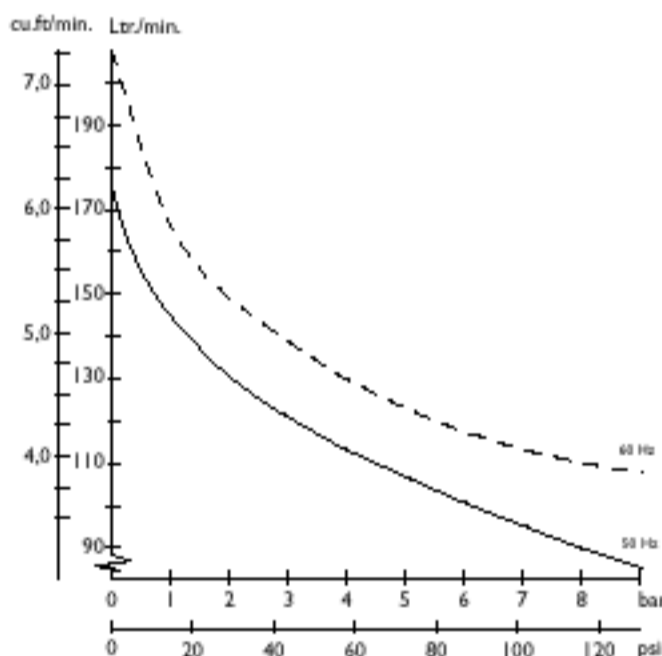

Dimensions (l x w x h)
665 x 638 x 861 mm / 26 1/8 x 25 1/8 x 33 7/8 inch

- ¹⁾ Higher pressure available upon request
- ²⁾ Neutral is required in installation
- ³⁾ Displacement is reduced by approx. 18-20% on units with dryer (D). Min. pressure required to operate dryer: 6 bar.

Technical modifications reserved



Laboratory Precision Limited

30 Lanchester Way, Royal Oak Industrial Estate,
Daventry, Northamptonshire, NN11 5PH. United Kingdom
Tel. +44 1327 877774 Fax. +44 1327 877444
sales@silent-air-compressors.com

www.silent-air-compressors.com